


Self-ballasted LED-lamps Product Specification

Dimension

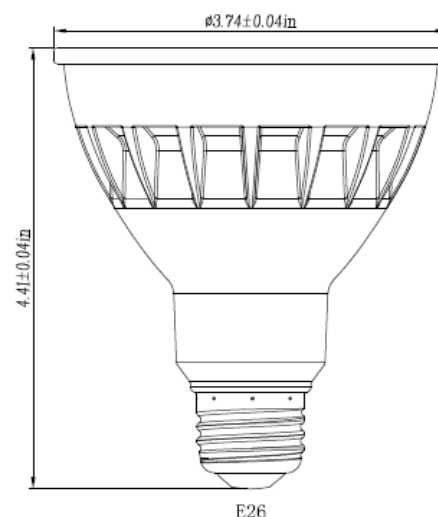

I. Basic Data

1	Product Name	PAR30L LED Lamp	
2	Model No.	T-L7PAR30LD-26W-COB-IP65	
3	Base(standard designation)	E26	
4	Certificate	Safety ETL & C-ETL	UL 1993:2017 Ed.5+R:06Aug2018 /CSA C22.2#1993:2017 Ed.3+U2
5		FCC	FCC PART 15 CLASS B
6		Other	RoHS
7	Dimmable	Dimmable	
8	Application:	Wet Location	

II. Electrical Data

1	Rated Voltage (Product)	90-277Vac
2	Rated Frequency	60Hz
3	Nominal Wattage	26W
4	Exact Wattage	<26W+10%
5	Nominal Current	353mA
6	Power Factor	≥ 0.9
7	THD	<30%

III. Light Technical Data

1	Color Temperature	3000K/4000K/5000K/6500K
2	CCT for Spec	3000K/4000K
3	Beam Angle	25 °
4	Luminous Flux	2600 lm
5	CBCP	12000 cd
6	Luminous Efficacy	100 lm/W
7	The Initial Measured Flux	$\geq 90\%$ of the rated value
8	Ra	Ra=80(TYPE)
9	Starting Time	<0.5s

IV. Lifespan

1	Average Lifetime:	25000 h
2	On/Off Cycles	50000(2 min on/2 min off)

V. Other

1	Protection Level	IP65
2	Operating Temperature	-25°C~45°C
3	Storage Temperature	-20~50°C
4	Humidity	$25 \pm 2^\circ\text{C}$, $\leq 90\%$
5	Dielectric Voltage Withstand	Test Voltage:1240VAC or 1754VDC,Test Time:60s

VI. LED

1	Model	COB
2	Manufacturer	Bridgelux

VII. Configurable Material

Cap-Base	Lamp Heatsink	Lamp Lens
Nickel platedcopper	die-cast aluminum +thermal conductive plastic	PC Lens

VII. Packing

	Packaging Type	Dimension L×W×H(mm)	G.W	CBM
Inner Box	Color box (1PC)	101x101x129mm	0.428kg	0,001315929
Outer Carton	Carton box (24PCS)	434x321x288mm	11kg	0,040122432