

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy	135 lm/W
CCT	3500K / 4000K / 5000K
CRI	85
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year
Factory Settings	105W 5000K

APPROVALS AND LISTINGS

ETL	5001780
DLC	S-FH4Q07, S-OZL3JL

LUMEN OUTPUT			
	3500K	4000K	5000K
70W	9990 lm	10214 lm	10150 lm
80W	11279 lm	11596 lm	11520 lm
90W	11941 lm	12240 lm	12155 lm
105W	13981 lm	14783 lm	14698 lm

ACCESSORIES

Motion Sensor	MS04-MW-HW-DC
Remote Control	MS01-RC
Emergency LED Driver	BLD-YT08D

IMPORTANT: MS04-MW-HW-DC **REQUIRES** MS01-RC for use (sold separately)

ELECTRICAL

Wattage	70W / 80W / 90W / 105W
Voltage	120-347V
Current	1.07A
Surge Protection	10kV
Power Factor	0.93
THD	14.3%
Operating Temp	-40°C to 40°C


CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP67*

DIMENSIONS AND WEIGHTS

Fixture Weight	14.55 lbs
Fixture Dimensions	50 x 4.7 x 10 in
Master Carton Qty	1
Master Carton Gross Weight	17 lbs
Master Carton Dimensions	51 x 10.8 x 5.5 in

DIMENSIONAL DRAWING (IN)

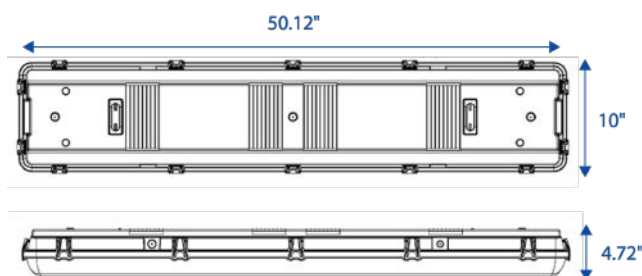

*When used with optional MS-KN01-XX, this luminaire is rated IP65