

Wall Cylinder

7W / 10W / 15W | 3CCT | 120-347V

Suitable for indoor and outdoor applications including retail stores, event spaces, hospitality venues, condominiums, building entrances, and more!



120-347V
Universal Driver
0-10V dimming

Direct
100% downlight

Powder Coat Finish
black

Cylinder Ring Illuminates



Power Selectable
7W / 10W / 15W

Colour Selectable
3000K / 4000K / 5000K

Built-in Photocell
unplug to bypass

Packaged in
Eco-friendly
Packaging
without plastic

TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy	105 lm/W
CCT	3000K/4000K/5000K
CRI	>80
Distribution	Direct (100% downlight)
Beam Angle	60°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	15W 4000K

LUMEN OUTPUT			
	3000K	4000K	5000K
7W	739 lm	779 lm	812 lm
10W	1011 lm	1070 lm	1080 lm
15W	1411 lm	1468 lm	1497 lm

APPROVALS & LISTINGS

cUL	E482965
-----	---------

DIMENSIONS AND WEIGHTS

Fixture Weight	2.71 lbs
Fixture Dimensions	4.72 x 9.47 x 4.76 in
Master Carton Qty	6
Master Carton Weight	20.32 lbs
Master Carton Dimensions	15.67 x 9.88 x 11.26 in
Carton Qty	1
Carton Weight	3.02 lbs
Carton Dimensions	9.37 x 4.96 x 5.24 in


ELECTRICAL

Wattage	7W/10W/15W
Voltage	120-347V
Current	0.2A
Surge Protection	6kV
Auxiliary Output	N/A
Power Factor	0.9
THD	≤15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Glass
Finish	Powder Coated
Finish Colour	Black
IP Rating	IP65

DIMENSIONAL DRAWINGS (IN)

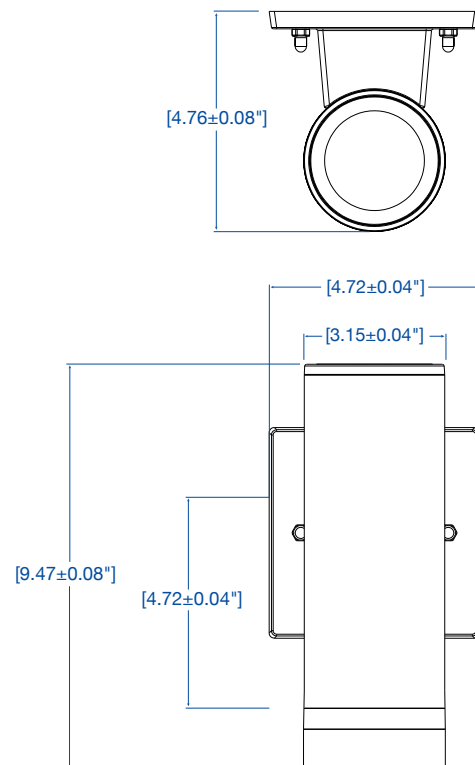

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833