

MW SERIES

LOW PROFILE LED UP AND DOWN WALL SCONCE





**OUTDOOR
USED**



**TRIAC
DIMMABLE**



IP65

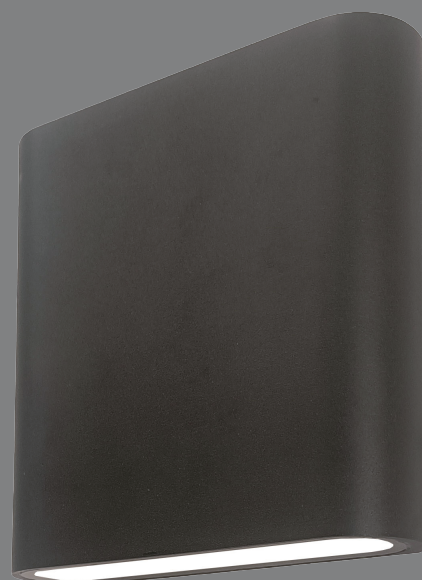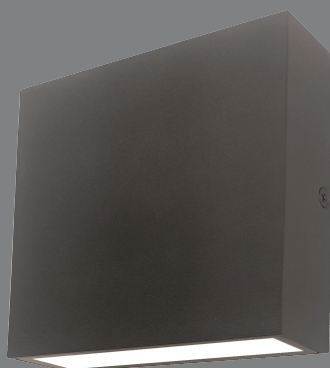

Aluminum body with glass diffuser
Elegant design, provide a more high end looking
Installation: Up&Down, Up, Down
Rated for long life - over 50,000 hours
Input: AC120-277V/ Triac Dimming at 120V



TRIM FINISH

White	
Black	
Gold	
Natural colours	



Beam Angle



Lifespan



Color Rendering
Index



Color
Temperature

**COLOR
ADJUSTABLE**
2700K, 3000K, 3500K,
4000K, 5000K



120-277V
voltage



Wet
Locations

Sizes

5.35"*5.35"

18W
1500Lm

5.35"*10"

24W
2400Lm

10"*10"

24W
2400Lm

5"*5"

15W
1000Lm


5"*10"

24W
2400Lm

12"*12"

30W
2700Lm

LED OUTDOOR WALL SCNCE

	Size	Shape	Model	Input Voltage	Watts	Lumen	CRI	CCT's
 OD-WS04	5.35"*5.35"	Round	OD-WS04	AC120V-277V	18W	1500Lm	90Ra	2,700K 3,000K 3,500K 4,000K 5,000K
 OD-WS15	5.35"*10"	Round	OD-WS15	AC120V-277V	24W	2400Lm	90Ra	2,700K 3,000K 3,500K 4,000K 5,000K
 OD-WS16	10"*10"	Round	OD-WS16	AC120V-277V	24W	2400Lm	90Ra	2,700K 3,000K 3,500K 4,000K 5,000K
 OD-WS17	5"*5"	Square	OD-WS17	AC120V-277V	15W	1000Lm	90Ra	2,700K 3,000K 3,500K 4,000K 5,000K
 OD-WS05	5"*10"	Rectangle	OD-WS05	AC120V-277V	24W	2400Lm	90Ra	2,700K 3,000K 3,500K 4,000K 5,000K
 OD-WS18	12"*12"	Square	OD-WS18	AC120V-277V	30W	2700Lm	90Ra	2,700K 3,000K 3,500K 4,000K 5,000K



ORDERING GUIDE

** represents different color finish. Example: OD-WS04-**


OD-WS04

WH= White
BK= Black
GL= Gold
NC= Natural Colours


DIMENSIONS

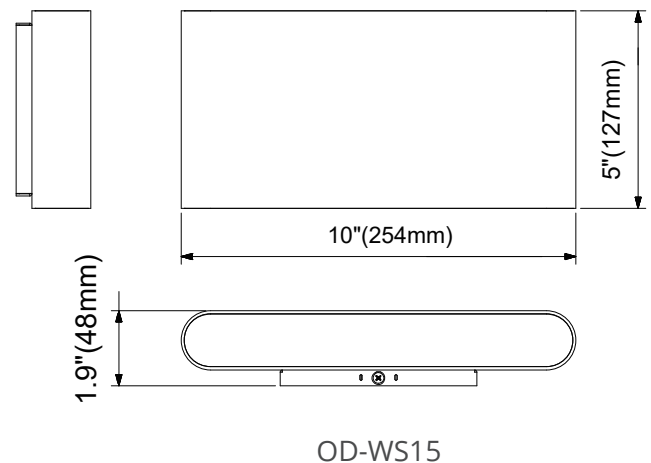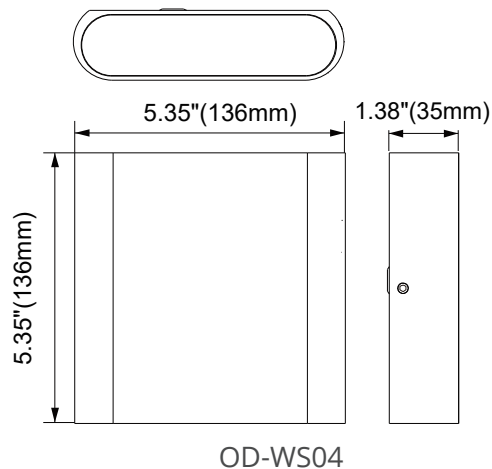


DIMENSIONS

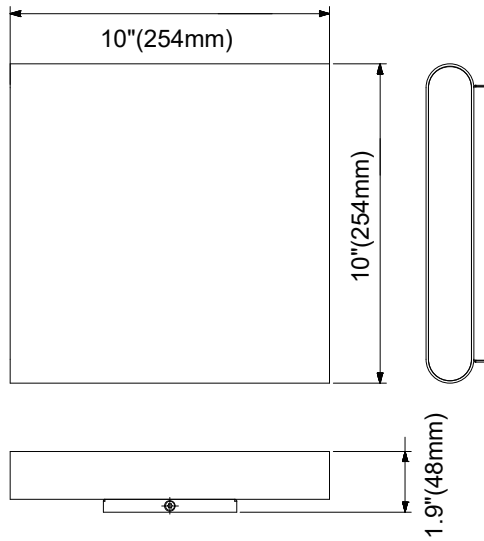


OD-WS16

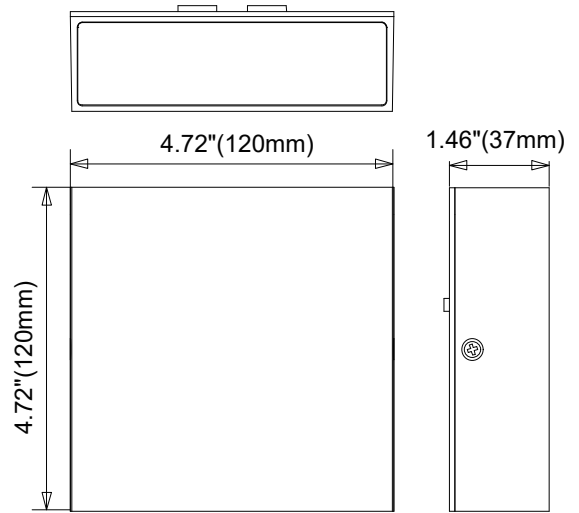

OD-WS17

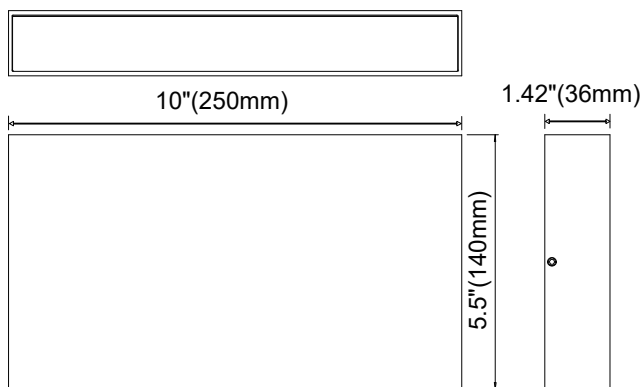

OD-WS05

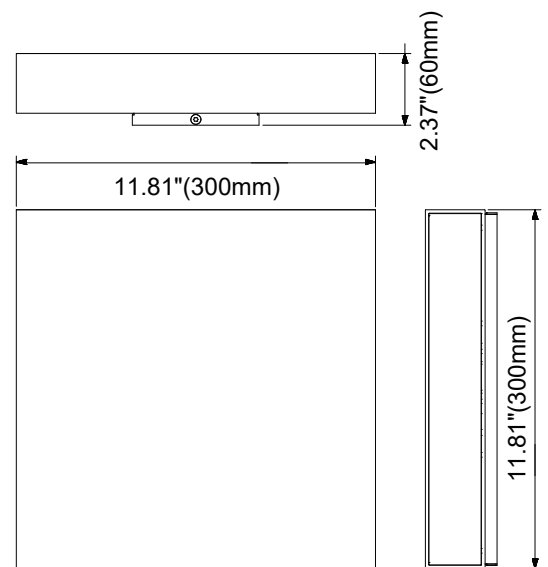

OD-WS18