


# LED Pendant Light

North America



Surface Mount

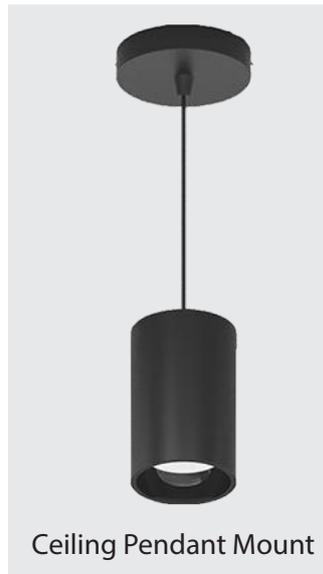

Ceiling Pendant Mount



Track Pendant Mount

## Main Features:

- COB LED chips, no shadow, strong penetrability, high fidelity CRI 83/97 and high efficacy up to 100lm/W.
- Triac dimming, smooth range from 100% to 10%, and compatible with most dimmers, such as Lutron, Leviton, Smart Home, Arctic Lighting etc.
- UL certified driver, no flicker, high PF 0.98, instant start, noise free.
- 5CCT adjustable (2700K, 3000K, 3500K, 4000K, 5000K) optional.
- Built-in driver, anti-glare design.
- Finished color: Black, White.

Model No.	Size	Power	Voltage	Luminous Flux	CCT Optional	CRI	Beam Angle	Dimming
LW-PD15W	φ76x150mm φ2.99"x5.91"	15W	AC120V AC220-240V	1500lm 1350lm	2700K/3000K/4000K/5000K 5CCT adjustable	83Ra/97Ra 93Ra	15°/30°/45°	Triac
LW-PD20W	φ96x150mm φ3.78"x5.91"	20W	AC120V AC220-240V	2000lm 1800lm	2700K/3000K/4000K/5000K 5CCT adjustable	83Ra/97Ra 93Ra	15°/30°/45°	Triac
LW-PD30W	φ116x150mm φ4.57"x5.91"	30W	AC120V AC220-240V AC100-277V	3000lm 2700lm	2700K/3000K/4000K/5000K 5CCT adjustable	83Ra/97Ra 93Ra	15°/30°/45°	Triac 0-10V
LW-PD40W	φ142x160mm φ5.59"x6.30"	40W	AC120V AC220-240V AC100-277V	4000lm 3600lm	2700K/3000K/4000K/5000K 5CCT adjustable	83Ra/97Ra 93Ra	15°/30°/45°	Triac 0-10V
LW-PD50W	φ142x160mm φ5.59"x6.30"	50W	AC120V AC220-240V AC100-277V	5000lm 4500lm	2700K/3000K/4000K/5000K 5CCT adjustable	83Ra/97Ra 93Ra	15°/30°/45°	Triac 0-10V

Remark: Single CCT Luminous flux is based on 3000K, 83Ra.  
3CCT, 5CCT Luminous flux is based on 3000K, 93Ra.

## Applications:

- Clothing/Shoe/Furniture/Jewelry stores
- Supermarkets
- Hotels/ Restaurant
- Auto shops
- Museum/Gallery
- Aisle
- Bar

