

WAC LIGHTING

Lotos R - Fire Rated

Adjustable Downlight 5CCT

Model	Beam	Color Temp & CRI	Lumens	Watt	Finish
R4ERA2R	W 50	2700K/3000K/3500K/4000K/5000K - 90	775	9W	FWT White (Fire Rated)

Example: **R4ERA2R-W9CS-FWT**

For custom requests please contact customs@waclighting.com

DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

FEATURES

- Fire Rated - ASTM E119, UL 263, ULC S101 and tested and certified for 2 hours
- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Minimum Plenum Space Required: 4 1/2"
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120-277 VAC, 50/60Hz
CRI	90
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8 Compliant, Wet Location Listed
Construction	Steel with frosted TIR lens

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____




FINISHES:



White (Fire Rated)

LINE DRAWING

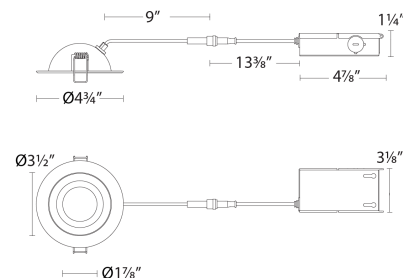

WAC LIGHTING

Lotos R – Fire Rated

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

ACCESSORIES

	Model	Description	Finish
	RER-FRAME	Lotos	