LUMINAIRE
Galarneau

Specification



GRADATEUR LED 200W, 600W INC.
DNA03AU11-600-W

● Technical Parameter


Model No	DNA03AU11-600-W	
Standard	UL1472	
Rated Voltage	120V～	
Rated Frequency	60Hz	
Rated Frequency	600W	
Load Range	Incandescent lamp	15W-600W
	LED lamp	3W-200W
	Halogen lamp	15W-600W
	Low voltage halogen lamp with electronic transformer	3W-200W
	Low voltage halogen lamp with iron core transformer	3W-200W
	CFL -- fewer than 5pcs	3W-200W
	Electric resistive heat	15W-600W
Switch times	≥40000次	
Power supply	Live Wire	
Installation method	In-Wall	
Operating Environment	Temperature：0℃ - 40℃	
	Humidity：10% R.H. - 90% R.H.	
Size	105 mm×44 mm×35mm (L×W×H)	
Application	Indoor	
Function	1. On/Off by the rocker, Dimming by the sliding. 2. The minimum brightness level can be set through adjustment button. 3. Startup and power off memory function. 4.Single-pole or 3-Way wiring 5. Over temperature protection	
Application	1.Can directly replace the existing wall switches.Can turn on, off and dimming for dimming LED,halogen, CFL. 2.Apply to living rooms, apartments, hotels, hospitals and other public places.	

● Function Table

Function	operation	3-way switch operation

ON/OFF	√	√
Dimming	√	×


● Illustration of function part

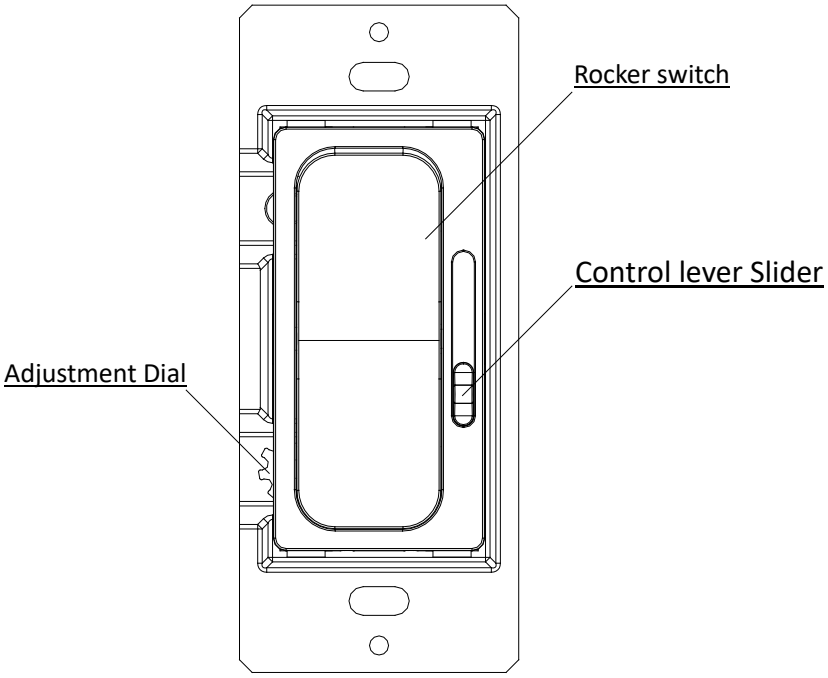


● Product testing, certification and standard requirements

Standards	Safety	UL1472
	Performance	UL1472
Certification	ETL	ETL Certified
RoHS	RoHS Compliance required	

Product Label

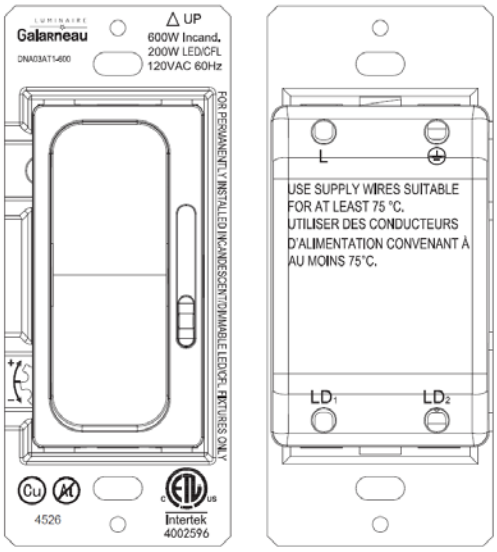



Product Size

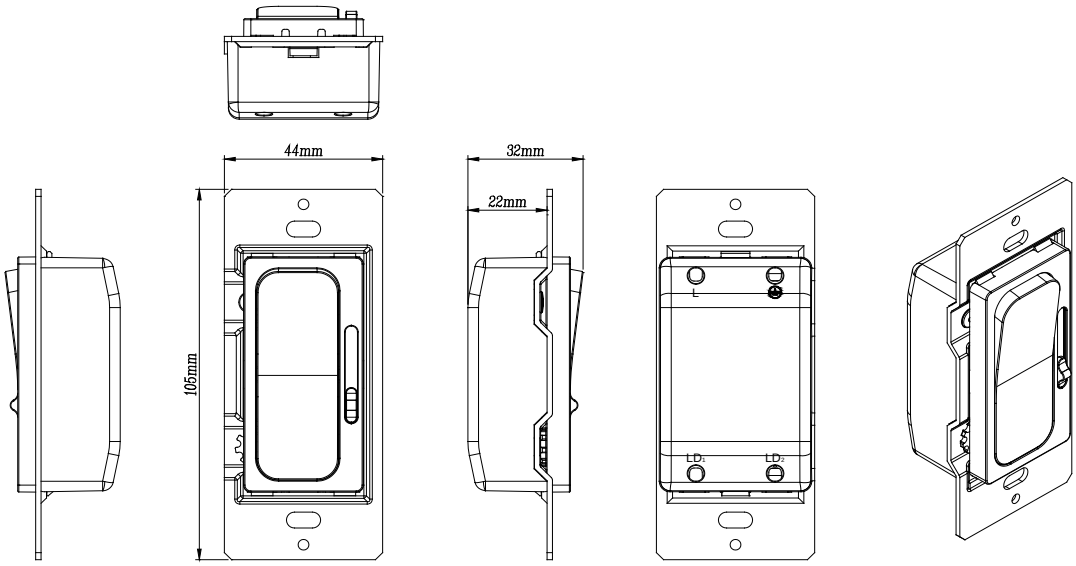


● Typical wiring application


1. Single-Pole

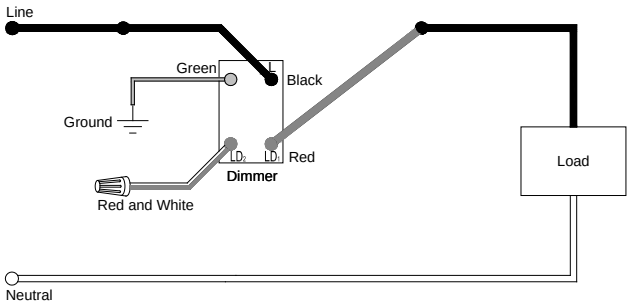

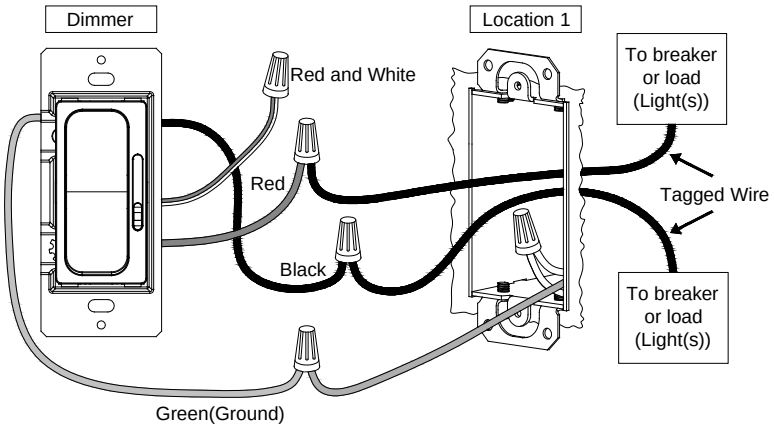

2. 3-way

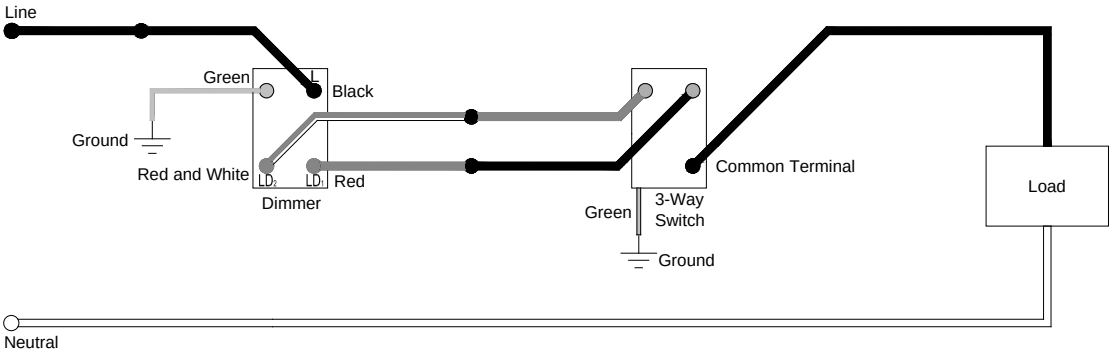

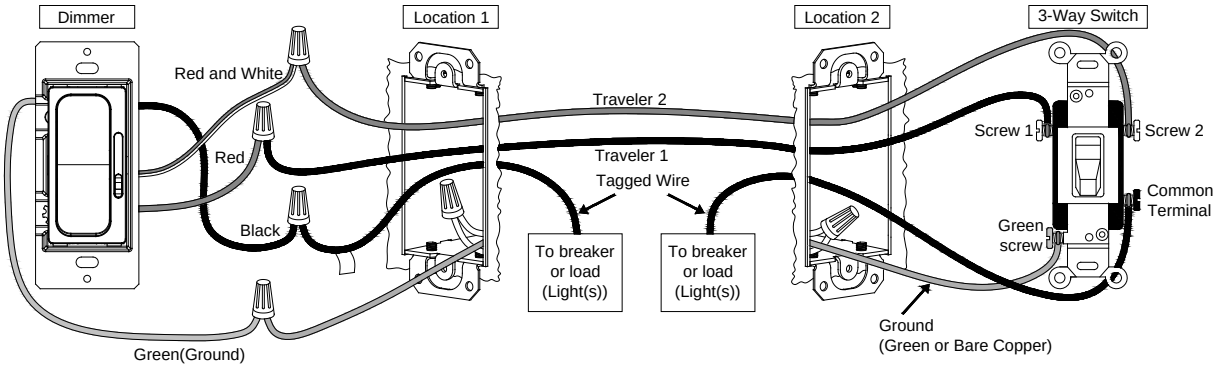

LUMINAIRE Galarneau