



# EASY CONNECT® INSTALLATION INSTRUCTIONS

IVL628A  
10/15

QUESTIONS OR CONCERNS CONTACT CANARM AT:  
1-800-265-1833 (English) • 1-800-567-2513 (French)  
Monday through Friday 8:00 AM to 5:00 PM E.S.T.

INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS  
READ ALL INSTRUCTIONS

## IMPORTANT SAFETY INSTRUCTIONS


### SAVE THESE INSTRUCTIONS

### SAFETY PRECAUTIONS:


1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
  2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- NOTE: Product May Not Look Exactly As Shown In Figures.**

## INSTALL EASY CONNECT MOUNTING BRACKET:

### STEP 1

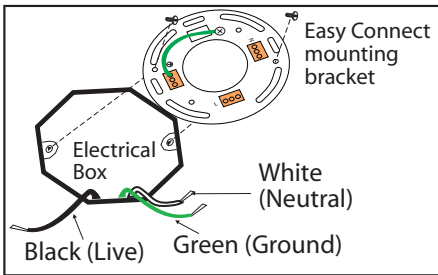


Attach easy connect mounting bracket to electrical box with electrical box screws (not included).

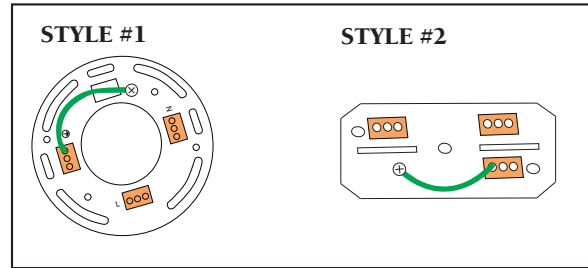


## CONNECT HOUSE WIRES

### STEP 2 - Option 1

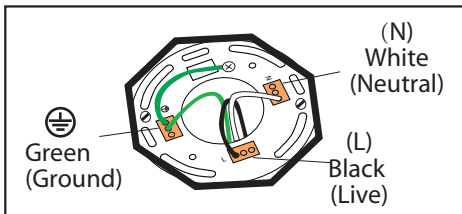

Connect (push) electrical wires from electric box (house wiring) into correct inserts. Black (Live), White (Neutral), Green (Ground)


### Option 2 - MULTIPLE ELECTRICAL BOX WIRES

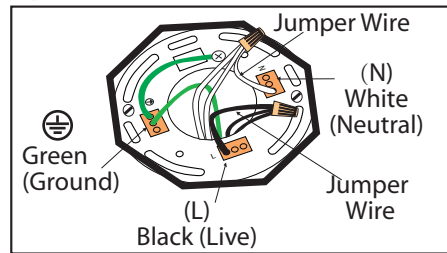

For multiple black (live) & white (neutral) wires joined in the electrical box (house wiring), attach a single "black" and "white" Jumper Wire before connecting. Strip 7mm from a 6" Jumper Wires (AWG 12-24) supplied. Then connect (push) wires into correct inserts.


## CONNECT LIGHT FIXTURE

### STEP 3

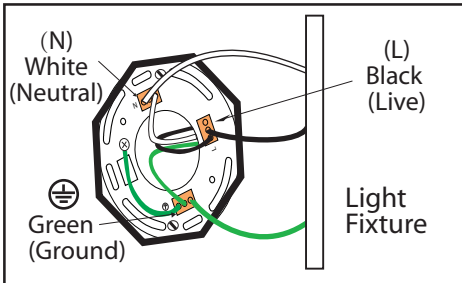

Connect (push) electrical wires from fixture into correct inserts. Black (live), White (neutral), Green (ground)


### STEP 4



Tuck electrical wires into outlet box and position fixture over studs on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).

**Note:** If required, assemble body and spread the arms of the fixture out evenly.

## STEP 5 - Note: Refer to the style of assembly that matches the style of your fixture.

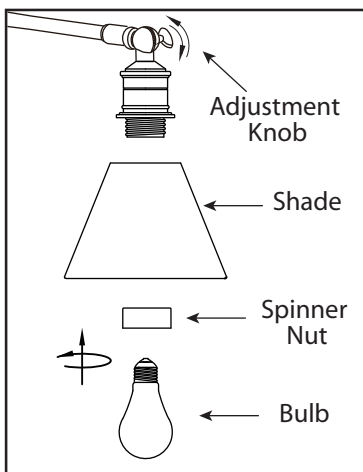

Remove spinner nut from socket. Position shade on lamp and secure with spinner nut.

Install specified bulb type and wattage (not included).

**Optional for some models**  
Adjust the arm of the lamp as desired using the adjustment knob.