LED Linear Pendant

LP73048 INSTALLATION SHEET

START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926


- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- 4. Thread connector (3b) into fixture (3a) to secure
- 5. Slide shade (3c) onto fixture strip (3d), followed by plug (6a) (See Illustration 1)

1a.

1b.

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120V input
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package and place driver (4a) in canopy (2a)
- **1.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)
- Mark and install ceiling anchors (5b) with anchor (5a), and screw (5c), opening on ceiling anchor (5b) facing towards canopy (2a). Ideal distance between ceiling anchors (3b) is 17-7/16". Close with cap (5d) by threading clockwise
- **9.** Fine tone wire length if necessary, by push and hold wire gripper (2g) and then adjust wire to desired length

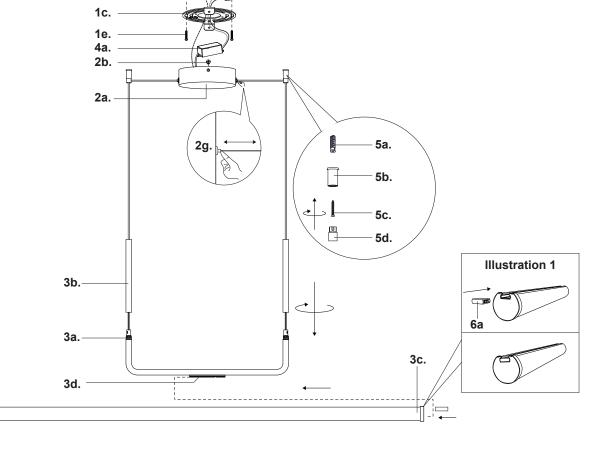

19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20230519