

# Cylinder

 Wall Mounted • Damp Location Listed **PROGRESS LED**

## Description:

5" LED up down wall cylinder - wall lantern in Antique Bronze. The P5675 Series are ideal for a wide variety of interior and exterior applications including residential and commercial. The Cylinders feature a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits. Specify P860045 top cover lens for use in wet locations.

## Specifications:

- Antique Bronze finish.
- Powder coat finish.
- Die-cast aluminum construction with durable powder coated finish
- 1,100 lumens 26 lumens/watt per module (delivered)
- 3000K color temperature, 90+ CRI
- Meets California Title 24 high efficacy requirements for outdoor use only.
- Dimmable to 10% with many ELV dimmers
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" recessed outlet box: 4.5 in W., 4.5 in ht., 2.95 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

## Performance:

Number of Modules	2
Input Power	17 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Down-Source)	795/46 (LM-82) per module
Lumens/LPW (Up-Source)	795/46 (LM-82) per module
Lumens/LPW (Source)	795/46 (LM-82)
Lumens/LPW (Delivered)	1,100/26 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed

# P5675-20/30K



## Dimensions:

Width: 5 in  
 Height: 14 in  
 Depth: 8-7/8 in  
 H/CTR: 8 in

# P5675-20/30K

**Photometrics:**

<b>ELECTRICAL DATA</b>	<b>P5675-20/30K</b>
Input Voltage	120 V
Input Frequency	60 Hz
Power Factor	0.931
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	


**P5675-20/30K**  
 LED Light Engine: 3000 K 90 CRI  
 System Wattage: 17  
 Fixture delivered lumens: 817  
 Fixture Efficacy: 23.7  
 Spacing Criteria: 0.94

**CANDELA DISTRIBUTION**

DEG	CANDELA	LUMENS
0	446	
5	444	42
15	413	11525 304 139
35	187	117
45	98	76
55	28	26
65	5	5
75	1	1
85	1	1
90	0	
95	0	0
105	0	0
115	0	0
125	0	0
135	0	0
145	20	23
155	265	114
165	416	114
175	458	43
180	465	

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%FIXT
0-30	296	36.3
0-40	413	50.6
0-60	515	63.1
0-90	522	63.9
90-120	0	0.0
90-130	0	0.0
90-150	23	2.8
90-180	295	36.1
0-180	817	100.0

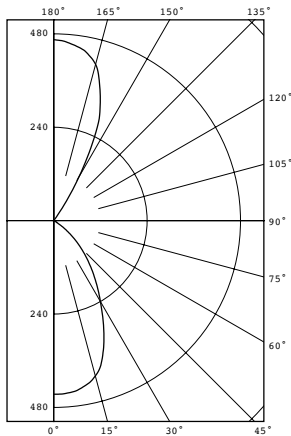

Test 17.02767 Test Date 10/31/17

# P5675-20/30K

## Dimming Notes:

---

P5675-20/30K is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

## Dimming Controls:

---

Lutron\_Diva DVELV-300P

Lutron\_Nova NTELV-300

Lutron\_Vierti VTELV-600

Lutron\_Maestro MAELV-600

Lutron\_spacer/system SPSELV-600

Leviton\_Renoir II AWRMG-EAW

Leviton\_6615-P

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.