

# NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V | 4ft

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



Colour Selectable  
3500K / 4000K / 5000K



Stainless Steel Spring Clips

One Piece Gear Tray  
for quick access to driver and accessories



120-347V Driver

Polycarbonate Low Glare Lens

Power Selectable  
30W / 45W / 60W



1/2" NPT Entry



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC



BLD-YT08D

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	7,800 lm
Efficacy	130 lm/W
CCT	3500K / 4000K / 5000K
CRI	84
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year

### APPROVALS AND LISTINGS

ETL	5001780
DLC	S-ZA1MJ8, S-RHP140, S-HG5A9L

### ISOCANDELA PLOT

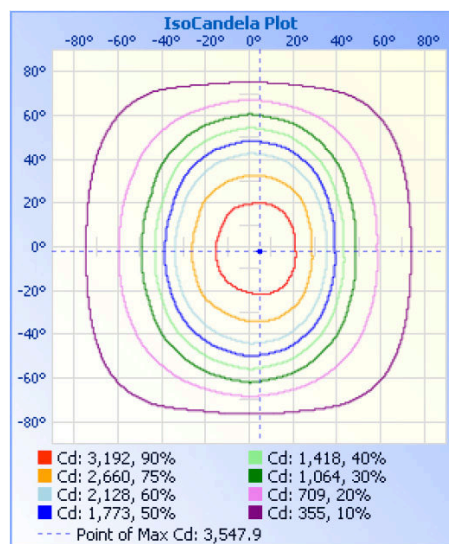

### ILLUMINANCE AT A DISTANCE

Distance (ft)	Illuminance at a Distance	
	Center Beam fc	Beam Width
4.0ft	219.2 fc	9.1 ft x 6.4 ft
8.0ft	54.8 fc	18.3 ft x 12.9 ft
12.0ft	24.4 fc	27.4 ft x 19.3 ft
16.0ft	13.7 fc	36.6 ft x 25.8 ft
20.0ft	8.8 fc	45.7 ft x 32.2 ft

■ Vert. Spread: 97.6°  
■ Horiz. Spread: 77.7°

### ELECTRICAL

Wattage	30W / 45W / 60W
Voltage	120-347V
Current	0.75A
Power Factor	0.96
THD	15.8%
Operating Temp	-40°C to 40°C

### CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66

### DIMENSIONS AND WEIGHTS

Fixture Weight	5.1 lbs
Fixture Dimensions	46.5 x 4.2 x 3.3 in
Master Carton Qty	4
Master Carton Gross Weight	25.6 lbs
Master Carton Dimensions	47.5 x 9.6 x 8.4 in
Carton Qty	1
Carton Gross Weight	5.8 lbs
Carton Dimensions	46.8 x 4.7 x 3.6 in

### DIMENSIONAL DRAWING (IN)

