



## Reinventing Safety All Around

1597, 2097, 1597NTLTR, 2097NTLTR, 1597TR, 2097TR, 1597TRWR, 2097TRWR, 1597TRA, 2097TRA, 1597IGTR, 2097IGTR, 1597SWTTR, 2097NA, 1597TRNA, 2097TRNA, 1597TRWRNA, 2097TRWRNA, 1597TRSGL, 2097TRSGL, 1597TRAPL, 2097TRAPL, 1597TRSGLAPL, 2097TRSGLAPL, 1597TRAAPL, 2097TRAAPL

The Pass & Seymour® Self-Test GFCI receptacle with SafeLock® Protection conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.

For Hospital Grade, refer to SF708R4.

## Features & Benefits

**Patented SafeLock® Protection:** if critical components are damaged and ground fault protection is lost, power to the receptacle is disconnected.

**Tamper-resistant automatic shutter system** prevents young children from inserting common household objects. Now contains "invisi-shutters" for an invisible effect.

**The indicator light flashes** if the device fails the self-test, signalling that the GFCI should be replaced.

**Side or internal screw-pressure-plate back wire termination** with #14 - #10 AWG stranded or solid, copper or copper-clad conductors.

**Captive screws** make for easier installation.



**Ground terminal clamp** allows for fast installation.

**Two back-wire holes per termination** add wiring flexibility, eliminate pigtailing and save box space.

**Prevents line-load reversal miswire:** No power to the face or downstream receptacles if wired incorrectly.

**High-impact-resistant, thermoplastic construction** for superior strength and durability.

**Thinner profile** speeds installation by leaving more room for wires in the box.

**Auto-ground clip** assures a positive ground to metal box.

**The most durable GFCI available.** Exceeds UL943 voltage surge requirements.

Meets 2015 UL Requirements

2097TRLA

## Field Uses/Vertical Markets

- Industrial
- Healthcare
- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling

## Ordering Information

### Specification Grade Self-Test GFCI Receptacles


Catalog Number	Description	Rating	Color	NEMA Config
1597TR*	Spec-Grade Tamper-Resistant 15 Amp GFCI	15A 125V	I, W, -, GRY, BK, LA, NI, DB, G	5-15R
1597*	Spec-Grade 15 Amp GFCI	15A 125V	I, W, -, GRY, BK, RED, LA	5-15R
1597TRA*	Spec grade Audible Alarm Tamper-Resistant GFCI 15 Amp	15A 125V	I, W, -, LA	5-15R
1597SWTTRR*CCD4	Combination Tamper-Resistant Switch/GFCI (No Federal Specification)	15A 125V	I, W, BK, LA, GRY	5-15R
1597NTLTR*CC4	Combination Tamper-Resistant 15 Amp Night Light/GFCI	15A 125V	I, W, BK, LA, NI, DB	5-15R
1597TRWR*	Spec-Grade Weather-Resistant 15 Amp GFCI	15A 125V	I, W, -, GRY, BK, LA	5-15R
2097TR*	Spec-Grade Tamper-Resistant 20 Amp GFCI	20A 125V	I, W, -, GRY, BK, RED, LA, NI, DB, G	5-20R
2097*	Spec-Grade 20 Amp GFCI	20A 125V	I, W, -, GRY, BK, RED, LA	5-20R
1597IGTR*	Spec-Grade Isolated Ground Tamper-Resistant GFCI	15A 125V	I, W, O	5-15R
2097IGTR*	Spec-Grade Isolated Ground Tamper-Resistant GFCI	20A 125V	I, W, GRY, O, LA	5-20R
2097NTLTR*	Combination Tamper-Resistant 20 Amp Night Light/GFCI	20A 125V	I, W, GRY, BK, LA	5-20R
2097TRWR*	Spec-Grade Weather-Resistant 20 Amp GFCI	20A 125V	I, W, -, GRY, BK, LA	5-20R
2097TRA*	Spec-Grade Audible Alarm Tamper-Resistant 20 Amp GFCI	20A 125V	I, W, -, LA	5-20R
1597TRNA*	NAFTA-Compliant Spec-Grade Tamper-Resistant GFCI	15A 125V	I, W, GRY, LA	5-15R
2097TRNA*	NAFTA-Compliant Spec-Grade Tamper-Resistant GFCI	20A 125V	I, W, GRY, LA	5-20R
2097NA*	NAFTA-Compliant Spec-Grade 20 Amp GFCI	20A 125V	I, W, GRY, LA, BL	5-20R
1597TRWRNA*	NAFTA-Compliant Tamper-Resistant Weather-Resistant GFCI	15A 125V	I, W, -, LA	5-15R
2097TRWRNA*	NAFTA-Compliant Tamper-Resistant Weather-Resistant GFCI	20A 125V	I, W, GRY, LA	5-20R
1597TRSGL	15A Tamper-Resistant Self-Test Simplex GFCI	15A 125V	I, W, GRY, LA, RED, -, BK	5-15R
2097TRSGL	20A Tamper-Resistant Self-Test Simplex GFCI	20A 125V	I, W, GRY, LA, RED, -, BK	5-20R
1597TRAPL	15A Tamper-Resistant Self-Test Sensitive Appliance GFCI	15A 125V	W	5-15R
2097TRAPL	20A Tamper-Resistant Self-Test Sensitive Appliance GFCI	20A 125V	W	5-20R
1597TRSGLAPL	15A Tamper-Resistant Self-Test Sensitive Appliance Simplex GFCI	15A 125V	W	5-15R
2097TRSGLAPL	20A Tamper-Resistant Self-Test Sensitive Appliance Simplex GFCI	20A 125V	W	5-20R
1597TRAAPL	15A Audible Alarm Tamper-Resistant Self-Test Sensitive Appliance GFCI	15A 125V	W	5-15R
2097TRAAPL	20A Audible Alarm Tamper-Resistant Self-Test Sensitive Appliance GFCI	20A 125V	W	5-20R

**\*Color Designation**

I	<b>Ivory</b>	-	<b>Brown</b>	BK	<b>Black</b>	LA	<b>Light Almond</b>
W	<b>White</b>	GRY	<b>Gray</b>	RED	<b>Red</b>	NI	<b>Nickel</b>
AB	<b>Antique Brass</b>	DB	<b>Dark Bronze</b>	O	<b>Orange</b>	BL	<b>Blue</b>



NEMA 5-15R



NEMA 5-20R

For more information on these and other P&S products refer to our Catalog or visit our website.

For latest specs visit [www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)

## Technical Information

### 3rd Party Compliance

cULus Listed File Number E42190, Standard UL498 Attachment Plugs and Receptacles, Standard UL943 for GFCIs. Federal Specification WC596, Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 for GFCIs. Conforms to NEMA WD-1 and WD-6.

**Note: Depth of 1.03" for Simplex, Audible Alarm and Appliance versions.**

### Performance

#### Electrical

Dielectric Voltage	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Maximum Working Voltage	125VAC
Voltage Range	102-132VAC

#### Mechanical

Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device

#### Environmental

Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2


### Material Specs

Face: Nylon  
 Body: Nylon  
 Contacts: .03" Brass (.8)  
 Mounting Straps: Galvanized Steel  
 Terminal Screws: Nickel-Plated Steel #8 - 32  
 Hex Head Grounding Screw: Steel (Green)  
 Flat Head Mounting Screws: Zinc-Plated Steel  
 Test/Reset Buttons: Nylon  
 Auto-Ground Clip: Brass Alloy  
 \*Night Light Lens: Lexan®  
 \*\*Tamper-Resistant Shutter: Thermoplastic

\* For 1597NLTTR and 2097NLTTR Night Light versions only.  
 \*\* For 1597TR and 2097TR Tamper-Resistant versions only.

### Warranty

1 year

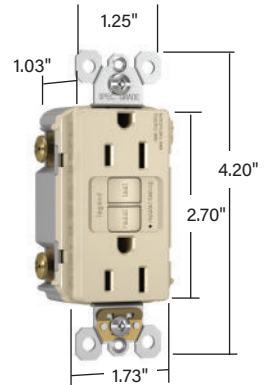

**Dimensions for 15 & 20 Amp**



**Audible Alarm**



**Nightlight/GFCI**



**Simplex**



**Weather-Resistant**



**Tamper-Resistant**


---

## Also available

- USB Charging Devices
- PlugTail® Devices
- Surge Protective & Isolated Ground Devices
- Ground Continuity Monitoring Devices (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Night Lights

---

designed to be better.

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)